

Go Getter Sound System

MADE IN USA




SIX YEAR WARRANTY

Technical Specifications

The Go Getter is perfect for voice projection in an indoor or outdoor setting, and for playing music during school activities. The unit delivers 109dB of intelligible speech, and is designed for users with little-to-no technical background.

Featuring a quick set-up and easy-to-use controls, the new Go Getter is a truly versatile sound system with true AC/DC operation, optional Bluetooth capability and improved battery life. The system is ideal for schools, corporate training, and places of worship.

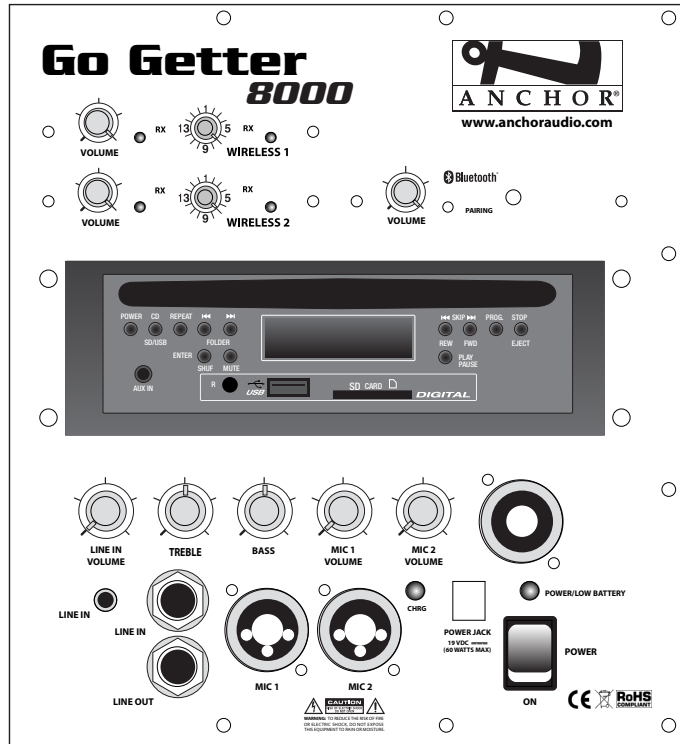

(GG-8000U2 Back Panel Shown)

Features

- Reach Crowds of 500+
- True AC/DC - 110/220V Power Supply
- Single or Dual UHF Wireless with 16 User Selectable Channels
- Optional CD/MP3 Combo Player
- Comes with Standard Built-in Bluetooth
- Remote Control for CD/MP3 Combo Player
- LED Displays Charging and Low Battery
- Two Microphone Combo Input Jacks
- 6.5" Woven Fiber Woofer & High-Output Horn Tweeter
- Lightweight at just 23 Pounds
- Improved "Limiter" Circuitry Reduces Distortion & Increases Intelligibility
- Durable Injection-Molded Polypropylene Case
- External Speaker Output Powers Optional Companion Speaker

GO GETTER MODELS

GG-8000	Go Getter with Bluetooth
GG-8000U1	Go Getter with Bluetooth & 1 wireless receiver
GG-8000U2	Go Getter with Bluetooth & 2 wireless receivers
GG-8000C	Go Getter with Bluetooth & CD/MP3 combo player
GG-8000CU1	Go Getter with Bluetooth, CD/MP3 combo player & 1 wireless receiver
GG-8000CU2	Go Getter with Bluetooth, CD/MP3 combo player & 2 wireless receivers
GG-8001	Unpowered companion speaker

UHF WIRELESS

- WH-8000** Wireless handheld microphone/transmitter (540-570 MHz)
- WB-8000** Wireless body-pack transmitter (540-570 MHz) (requires handsfree microphone) Microphone options include:
Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

TECHNICAL SPECIFICATIONS

Rated Power Output	75 watts AC/DC mode
Max SPL @ Rated Power	109dB @ 1 meter
Frequency Response	60 Hz - 16 kHz
AC Power Reqs.	90 - 264 VAC, 50/60 Hz
Dimensions (HWD)	18" x 11" x 9" (46 x 28 x 23 cm)
Weight (AC/DC)	23 lbs/ 10.4 Kg
Inputs	Microphone (Two combo) Lo-Z (1 K Ω), balanced, XLR 12 VDC condenser microphone phantom power
Auxiliary (line)	Hi-Z (10 K Ω), balanced 1/4" phone
Outputs	Hi-Z (10 K Ω), balanced 1/4" phone
Line (post fader)	Lo-Z, buffered, 1/4" unbalanced/balanced
Speaker Out	4-pole Neutrik Speakon [®] jack



(Features & Specifications Subject to Change Without Notice)

Anchor Audio, Inc.

Portable Sound Systems • Carlsbad, California

800.262.4671

www.anchoraudio.com