

Liberty Platinum Sound System

MADE IN USA



SIX YEAR WARRANTY

Technical Specifications



Features

Reach Crowds of 1,500+

AC Mode = 125W / DC Mode = 100W

Optional Single or Dual Built-in UHF Wireless with 16 User Selectable Channels

Optional Built-In CD/MP3 Combo Player

Remote Control for CD/MP3 Combo Player

3.5mm input for iPod®

Comes with Standard Built-in Bluetooth

USB Port for Charging MP3 Player/iPod

Two Universal Microphone Input Jacks

Recessed Back Panel Protects Knobs and Ports

True AC/DC or AC only - 110/220V Power Supply

Ceramic Compression Driver

10" Woofer

Proprietary Class D Amplifier


User Replaceable Batteries

Charging LED Bar Indicator

Operates 6-8 hours on a Single Charge

Speaker Out to Power Companion Speaker

AC Only Also Available

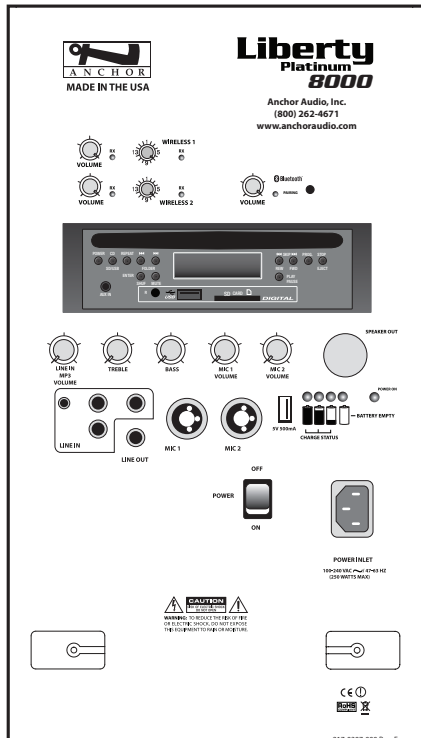

(LIB-8000CU2 Back Panel Shown)

LIBERTY MODELS AC/DC

- LIB-8000 Liberty with Bluetooth
- LIB-8000U1 Liberty with Bluetooth & 1 wireless receiver
- LIB-8000U2 Liberty with Bluetooth & 2 wireless receivers
- LIB-8000C Liberty with Bluetooth & CD/MP3 combo player
- LIB-8000CU1 Liberty with Bluetooth, CD/MP3 combo player & 1 wireless receiver
- LIB-8000CU2 Liberty with Bluetooth, CD/MP3 combo player & 2 wireless receivers
- LIB-8001 Unpowered companion speaker

UHF WIRELESS

- WH-8000 Wireless handheld microphone/transmitter (540-570 MHz)
- WB-8000 Wireless body-pack transmitter (540-570 MHz) (requires handsfree microphone) Microphone options include:
Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

TECHNICAL SPECIFICATIONS

| | | | |
|--------------------------|---|------------------------------|---|
| Rated Power Output | 125 watts AC / 100 watts DC | Mic Inputs: | Lo-Z (1 K Ω), balanced, XLR 12 VDC condenser mic (phantom) power |
| Max SPL @ Rated Power | 117 dB | | Hi-Z (10 K Ω), unbalanced, 1/4" phone |
| Battery | Two 12 V, lead acid rechargeable, 9.0 AH Full recharge: approx 7 hrs | | Hi-Z (10 K Ω), unbalanced, 1/8" stereo unbalanced, stereo RCA |
| Frequency Response | 60 Hz - 15 kHz \pm 3dB | Line In | |
| Line Output (post fader) | isolated, 600 Ω , 1/4" phone | Sensitivity For Rated Output | |
| AC Power Reqs. | 100 - 240 VAC, 50/60 Hz, 300W max | Lo-Z Microphone | -52 dBV (2.5 mVrms) |
| USB | 5V 500mA | Hi-Z Microphone | -43 dBV (7.5 mVrms) |
| Dimensions (HWD) | 22" x 14" x 11.5" (56 x 35.6 x 29.2 cm) | Auxiliary (line) | -14 dBV (200 mVrms) |
| Weight (AC/DC) | 38 lbs / 17 Kg | Phantom Power | 36V |
| Weight (AC only) | 26 lbs / 12 Kg | Speaker Out | 4-pole Neutrik Speakon® jack |

(Features & Specifications Subject to Change Without Notice)



Anchor Audio, Inc.
Portable Sound Systems • Carlsbad, California

800.262.4671
www.anchoraudio.com